

## **Bullet-resistant cash counter BALSTOP**

Bullet-resistant counter BALSTOP is designed for separating unprotected area and protected area in security-sensitive properties like banks, post offices, cash offices, consular departments, prisons, armories and so on.

Bullet-resistant counter BALSTOP is supplied in FB 3 NS level or FB 4 NS level with certification in accordance with EN 1522 and EN 1523. There is used security bullet-resistant glass in BR 3 NS level or BR 4 NS level with certification in accordance with EN 1063 in the counter. The glass prevents injuries of staff by flying glass fragments in case of armed assault. Integral part of that certified bullet-resistant counter is the shifting tray for cash or documents with mechanical locking. The counter is equipped by duplex communicator with control unit containing with sensitive microphone and loudspeaker on service side and anti-vandal microphone and built-in loudspeaker on client's side.



### **Technical data:**



Surface finishing:	brushed stainless steel
Upper board material:	laminated plywood
Dimensions (h x w x d):	1075 x 930 (730 or 1130) mm x 780 mm
Frame width (thickness of the wall):	150 mm
Height of the construction opening:	1050 mm
Width of the construction opening:	880 mm (680 mm or 1080 mm)
Height above the floor finishing:	845 mm (recommended)
Glazing:	BR 3 NS or BR 4 NS
Communicator:	vandal-resistant duplex voice communicator
Cash tray:	shifting, bullet-resistant
Certification:	FB 3 NS or FB 4 NS

### **Options for surcharge:**

- Venetian blind
- lighting
- different surface materials
- different dimensions

### **Available models:**

BALSTOP 55 FB3 – total width 730 mm, glazing width 549 mm, FB3 NS certification  
BALSTOP 75 FB3 – total width 930 mm, glazing width 749 mm, FB3 NS certification  
BALSTOP 95 FB3 – total width 1130 mm, glazing width 949 mm, FB3 NS certification  
BALSTOP 55 FB4 – total width 730 mm, glazing width 549 mm, FB4 NS certification  
BALSTOP 75 FB4 – total width 930 mm, glazing width 749 mm, FB4 NS certification  
BALSTOP 95 FB4 – total width 1130 mm, glazing width 949 mm, FB4 NS certification

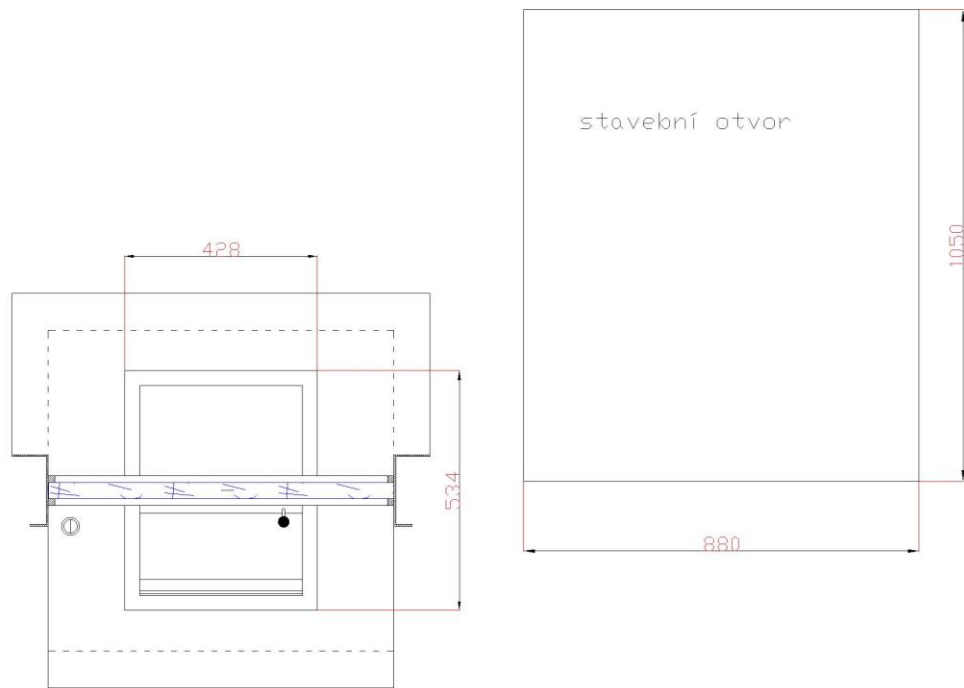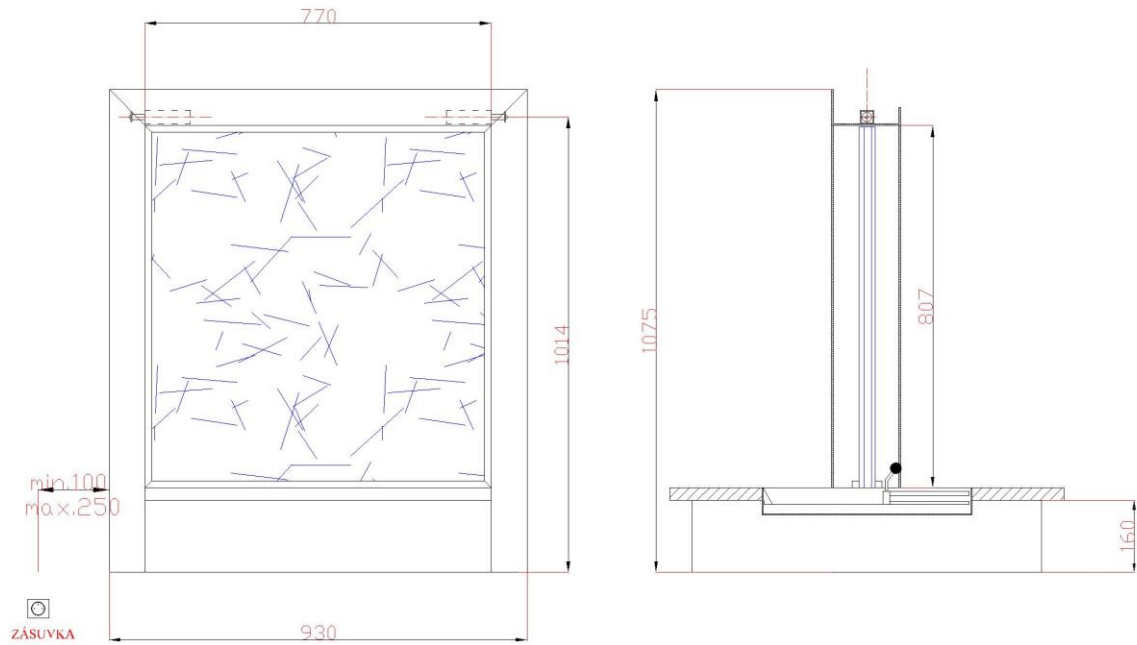

POKLADNÍK